



1. Wrap the white tape around the connecting rod screw, then fix the connecting rod to the wall with a hexagon spoon.

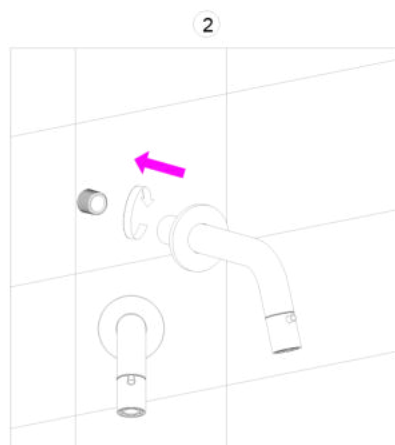

2. Install the faucet on the connecting rod and then push the cover plate against the wall until it is close to the wall.

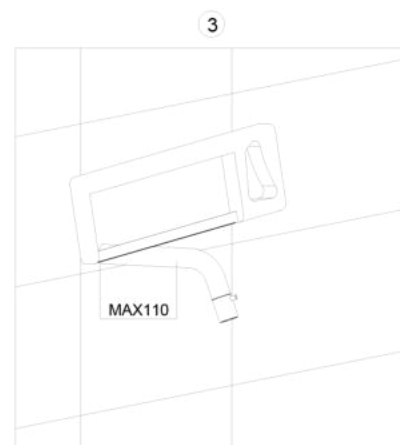

3. The spout length can be resected according to the need, and the maximum resected length should not exceed 110mm.

Maintenance

(1) To keep the surface of the faucet bright and clean, please clean the faucet regularly.

1. Clean with water frequently with Soft cotton cloth, colorless glass cleaner, do not have grind action.

2. Do not use acidic detergents, which can erode surface coatings.

3. Do not use cleaning powder or polishing powder containing coarse particles of detergent or nylon brush, in order to avoid wearing out products.